


# S9470i Series

Quatro



## DIMENSIONS



W	H	D	MC	BASE MODEL NO.
13"	7"	6 7/8"	3 1/2"	S9470i-L24
13"	7"	6 7/8"	3 1/2"	S9470i-L32
13"	7"	6 7/8"	3 1/2"	S9470i-L40

## SPECIFICATIONS

**Driver:** 0-10V dimming, 120/277

**Mounting:** Mounts to all Standard Electrical Junction Boxes (by others) With Hardware Provided. Silicone Seal Required (by others).

## FEATURES

- 3000/3500/4000K on-board optional CCT
- 24/32/40W on-board optional outputs
- IP65 Rating
- Type 3 Distribution Pattern
- Tempered Glass Lens
- Downlight Suitable for Wet Location
- Uplight Suitable for Damp Location
- UL Listed for Wet Location
- Full Cut-off Distribution
- LED 0-10V Dimming Driver

## ORDER AS A COMPLETE UNIT:

**Model No. + Lamp Code + CCT + Finish + Option Code**

S9470i-L24	+	30K	+	PT	+	Option
S9470i-L32		35K		SD		
S9470i-L40		40K		XT		

## FINISHES

**PT** Powder Coated Finishes\*

**SD** Shimmer Dimensional Metallic Finishes\*

**XT** Trending Brushed Metal Finishes\*

\*(Specify Color Code from the list of Finishes [except interior only metallics] – ie. Gold Touch would be 'GT')

## OPTIONS


**IEML** Integral Emergency 9W Driver

**PS** Photosensor

## LIGHT OUTPUT

**LXX** = ~ 135 LPW Delivered Lumens (Example: L16 = 16W x 135LPW = 2,160 Lumens)

## SPECIAL FEATURES *(these features come on all models)*

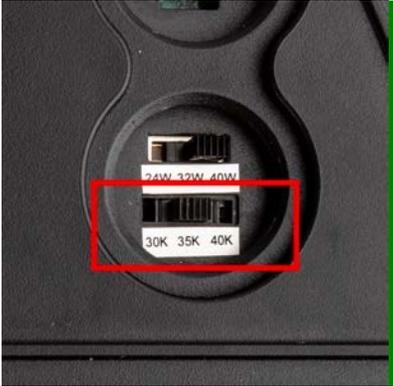

### 3 Color Temperatures

On board switch allows for on-site adjustment to 3000/3500K/4000K options.

**Note:** For factory Pre-set, please indicate the CCT in the part number (ex: S9470-L24-35K-BL)





### 3 Power Levels

On Board Switch allows for on-site adjustment to 3 power levels.

40W/32W/24W

**Note:** For Factory Pre-Set Watts, please indicate the Watts in the part number (ex: S9470-L32-30K-BZ)

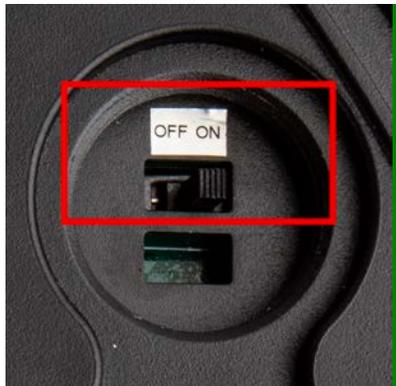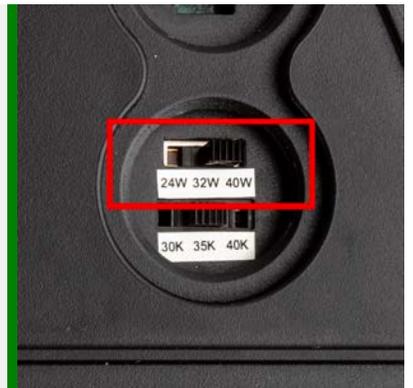

### Photosensor

On Board Sensor and Switch allows an internal photosensor to be turned on or off as needed.

**NOTE:** For Factory Pre-Set to ON, please indicate in the part number (ex: S9470i-L24-40K-BST-PS)