SM050 Series
Einka

Illuminated Mirrors

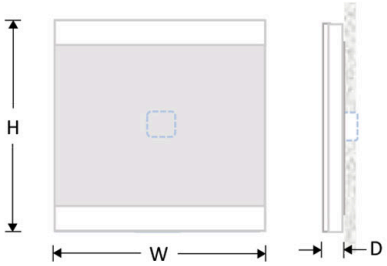

FEATURES

- 3″ High Illuminated Bands
- Shallow 2-1/8″ Depth
- Up to 48″ x 96″ Max Dimensions
- Forward Illumination w/ Ambient Glow

PART NUMBER

SM050_ - __ X __ - L930K - ____

For Custom Dimensions, Consult Factory

Note: Dimension cannot exceed 48" x 96". Minimum Width of 24".

Einka Mirror

SM050 = Glass
SM050A = Acrylic

Height (in.)

30″
36″
40″

Width (in.)

24″
30″
36″
40″
48″
54″

Source

L930K *(Standard)*
Options:
L927K
L935K
L940K

Options

NL = Night Light *(Separate Circuit)*
NS = Night Light w/ Touch Switch
SD = Step Dimming via Touch Switch
BAC = Buy America; Buy American Act; and Build America, Buy America Act Compliant.
For other options, consult factory.

SPECIFICATIONS

Housing: Post Powder Coated Heavy Ga. Paintlok™ Steel Housing for structural integrity, Aluminum LED bracketry for heat sinking
LED: 3000K, 90CRI, Constant Voltage. ~7W per linear foot of mirror perimeter.
Driver: Constant voltage 0-10V dimming driver, 120/277V. *(Consult factory for other options.)*
Mirror: 5MM glass w/polished edges. *(Optional 3/16″ silvered acrylic w/polished edges.)*
Translucent Frost: Opalex coating process resists fingerprints on frosted panels.
Wiring: Hardwired connection for centrally located J-Box *(by others)*.

www.ScottArchLighting.com I Tel (707) 864-2172 I Fax (707) 864-2182
© Copyright 2024 Scott Architectural Lighting. All Rights Reserved. Made in the USA.

PROUDLY MADE IN USA