




DIMENSIONS

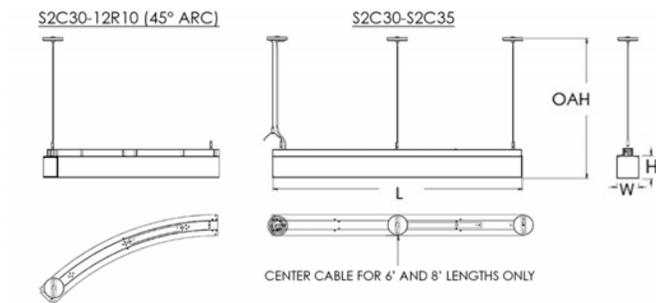

W	H	OAH	L	BASE MODEL NO.
5"	5"	48"	2'	S2C30-L22
5"	5"	48"	3'	S2C31-L33
5"	5"	48"	4'	S2C32-L44
5"	5"	48"	5'	S2C33-L55
5"	5"	48"	6'	S2C34-L66
5"	5"	48"	8'	S2C35-L88
5"	5"	48"	10' Dia. Curve (45° Arc)	S2C30-8R10-L40

Custom straight lengths are available, consult factory.

SPECIFICATIONS

Drivers: 0-10V dimming to 1%, 120/277

Mounting: Mounts to all Standard Electrical Junction Boxes (by others) with Hardware Provided

FEATURES

- Use individually or in Rows or Layouts
- Opal Acrylic Lens
- End to End Physical and Electrical Attachment
- Opal Acrylic End Caps and Dividers
- Combine the available 2' to 8' linear lengths and the 45° arc to effortlessly design unique and large-scale architectural lighting layouts.
- Factory drawings Required for Approval
- Interconnect functions to minimize shadowing at joints.
- LED 0-10V 1% Dimming Drivers

ORDER AS A COMPLETE UNIT:

Model No. + Lamp Code + Finish + OA + Option Code

S2C30-L22	+	27K	+	PT	+	OA	+	Option
S2C31-L33		30K		XT				
S2C32-L44		35K		CC				
S2C33-L55		40K						
S2C34-L66								
S2C35-L88								
S2C30-8R10-L40								

FINISHES

PT Powder Coated Finishes*

XT Trending Brushed Metal Finishes*

CC Custom Painted Finish

*(Specify Color Code from the list of Finishes – ie. Gold Touch would be 'GT')

OPTIONS

EML Remote 10W Emergency LED Battery Backup

OA Specify Overall Height of Fixture in Inches; E.G. – OA48

BK2 Black Cord with (2) Adjustable Aircraft Cables

WH2 White Cord with (2) Adjustable Aircraft Cables

END CAPS, INTERCONNECTS, AND AC CABLES (ORDER SEPARATELY)

S2C30-ECO Opal Acrylic End Cap

S2C30-ECA-(Finish) Aluminum End Cap


S2C30-ICA Acrylic Interconnect

S2C30-PCY-PT-96 AC Cable Y with Power Drop, Powdercoat finish canopy 96" Long

S2C30-ACY-PT-96 AC Cable Y with Powdercoat finish canopy 96" Long

S2C30-AC1-PT-96 AC Cable with Powdercoat finish canopy, 96" Long


S2C30-PC1-PT-96 AC Cable with Power Drop, Powdercoat finish canopy, 96" Long

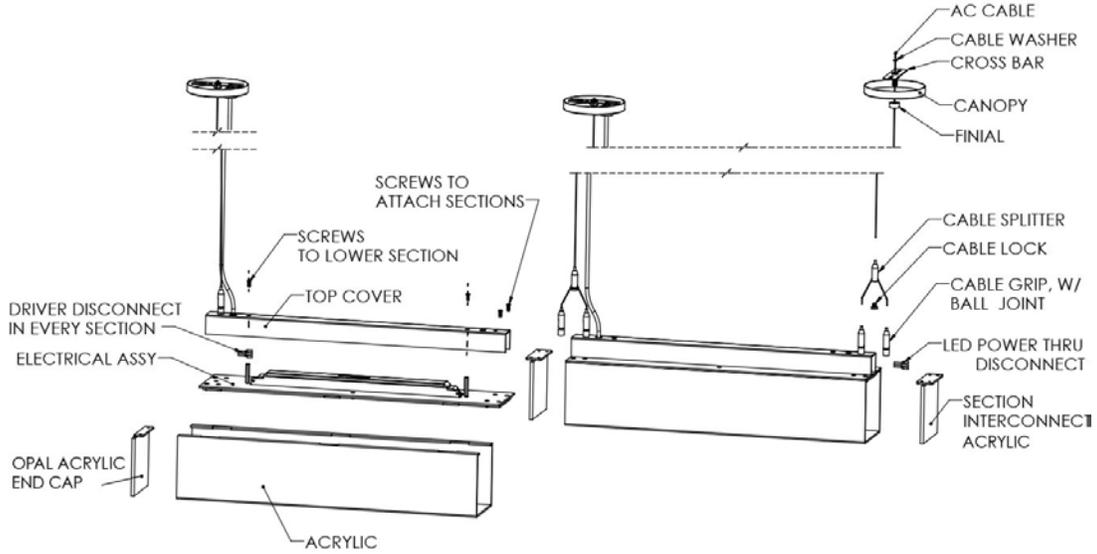

COMPONENTS



EXAMPLE OF 18' LINEAR LAYOUT

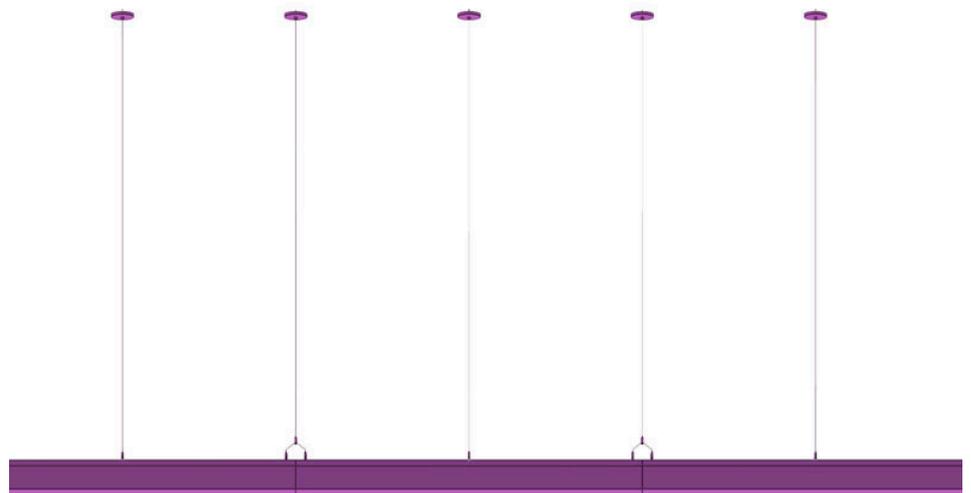

EXAMPLE OF RING LAYOUT

